Fig. 1

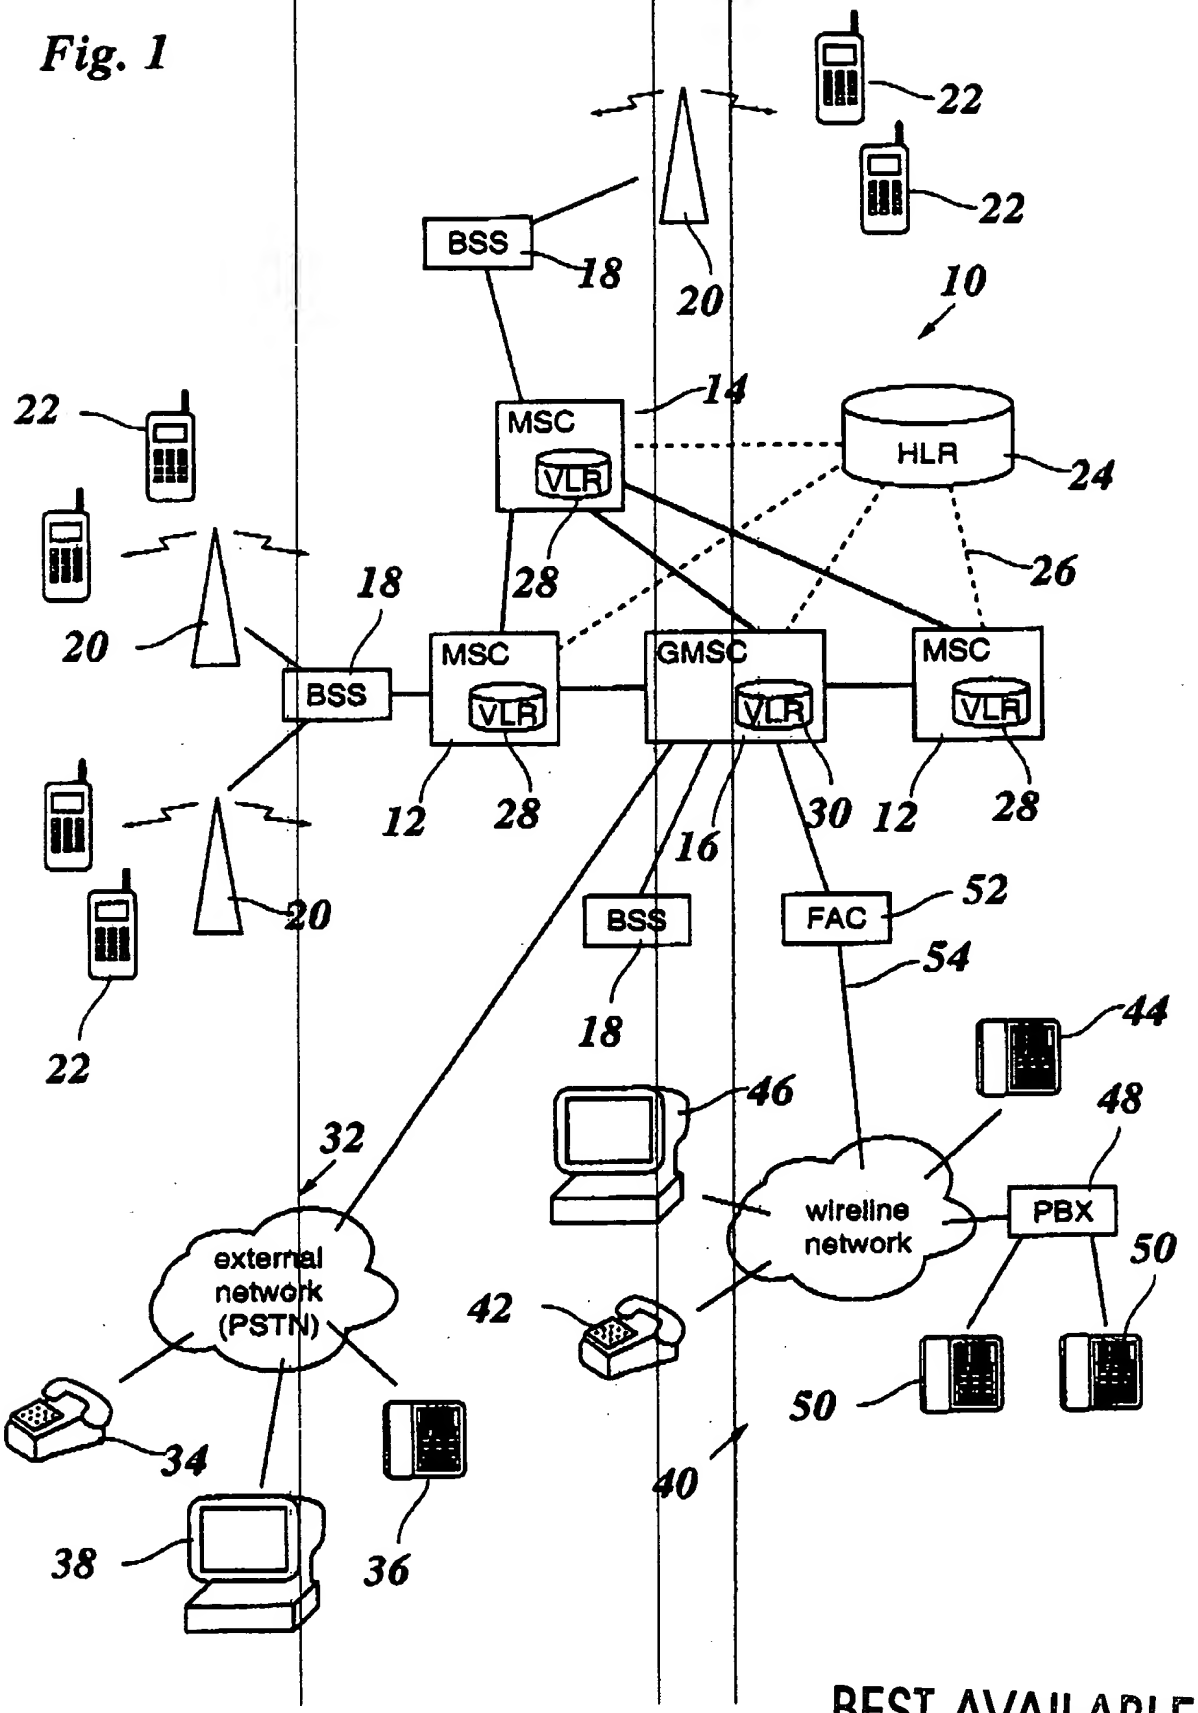

BEST AVAILABLE COPY

Fig. 2

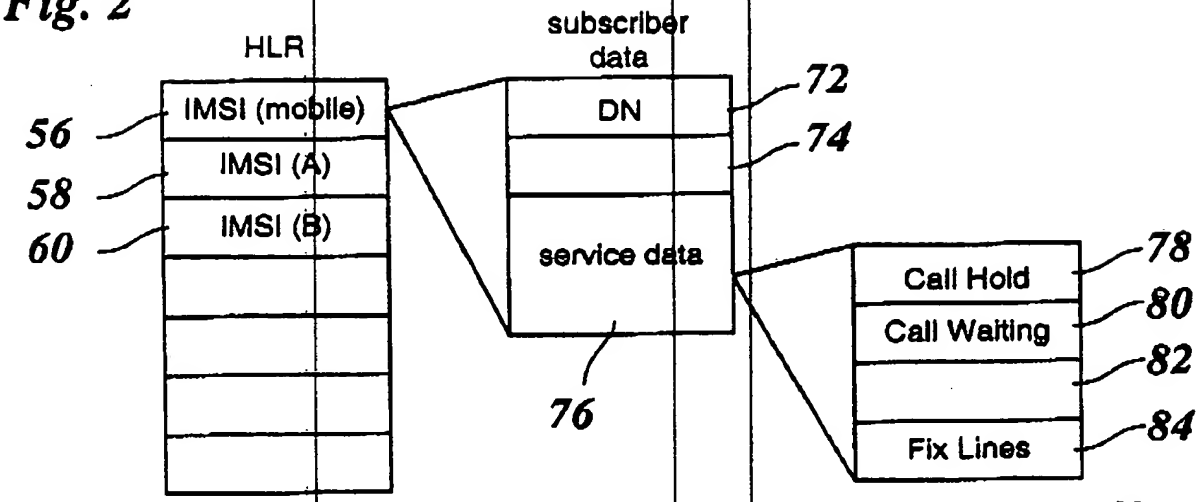

Fig. 4

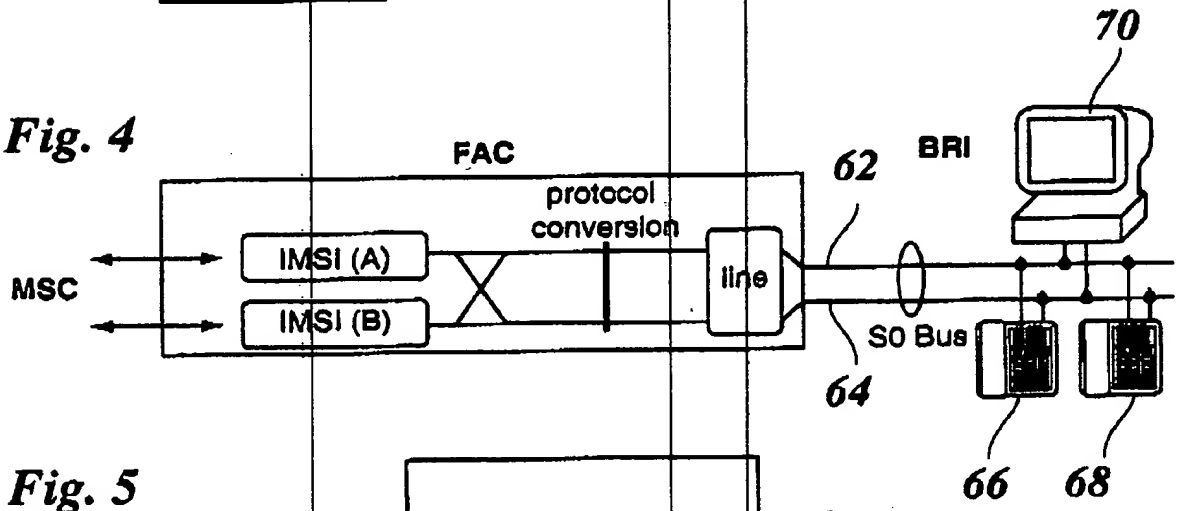

Fig. 5

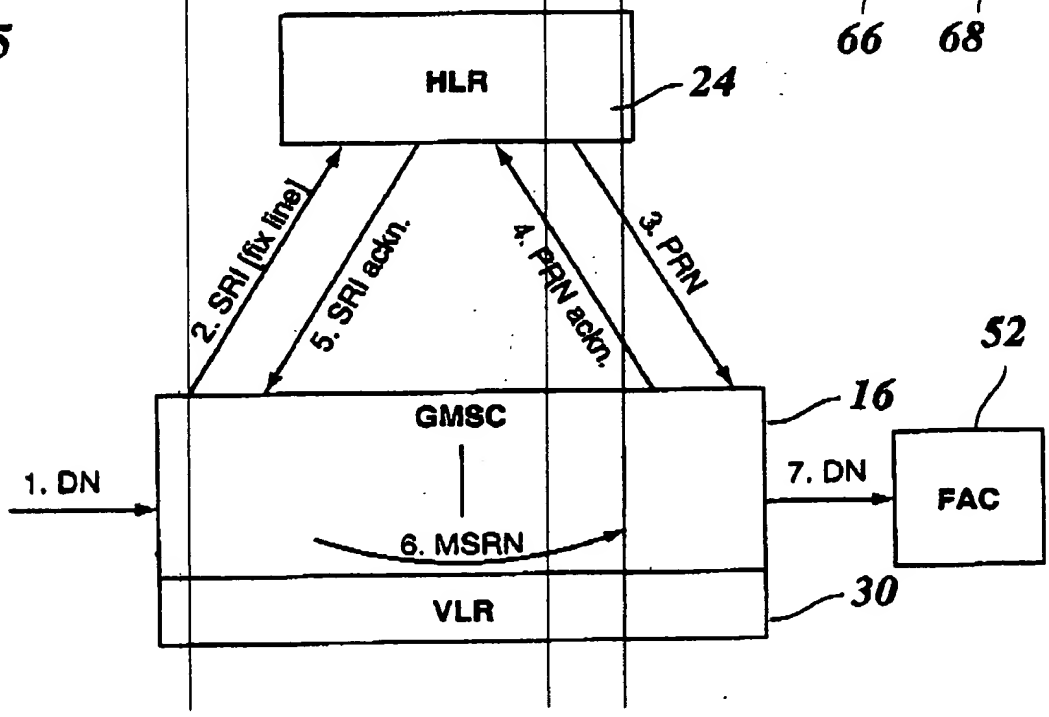

BEST AVAILABLE COPY

Fig. 3

84

```
{FIX_LINES}
  Access_Type [analog, BRI primary, BRI secondary, mobile]
    {analog}
      optional mobile_IMSI vector of 15 [0-9]s
    {primary}
        Access_Sub_Type [p2m, p2p]
        {p2m}
          vector of up to 3 multiples with
            DN1_CFD_Type [unconditional, busy, no_reply]
            DN1_ISDN_Basic_Service_Id [0..64]
            DN1_CFD_DN vector of up to 15 [0-9]s
          MSN vector of up to 11 [0-9]s
            vector of up to 3 multiples with
              CFD_Type [unconditional, busy, no_reply]
              ISDN_Basic_Service_Id [0..64]
              CFD_DN vector of up to 15 [0-9]s
          vector of up to 8 multiples with
            MSN vector of up to 11 [0-9]s
            vector of up to 3 multiples with
              CFD_Type [unconditional, busy, no_reply]
              ISDN_Basic_Service_Id [0..64]
              CFD_DN vector of up to 15 [0-9]s
        {p2p}
          Base_SN  vector of up to 11 [0-9]s
          Range    [(10), (100), (1000), (10000)]
          Term_on_0 [yes, no]
          vector of up to 10 multiples with
            EXT vector of up to 4 [0-9]s
            EXT_DN vector of up to 15 [0-9]s
    {secondary}
      Default_IMSI_MSIN vector of 10 [0-9]s
      optional mobile_IMSI vector of 15 [0-9]s
    {mobile}
      Default_IMSI vector of 15 [0-9]s
```

BEST AVAILABLE COPY

Fig. 6

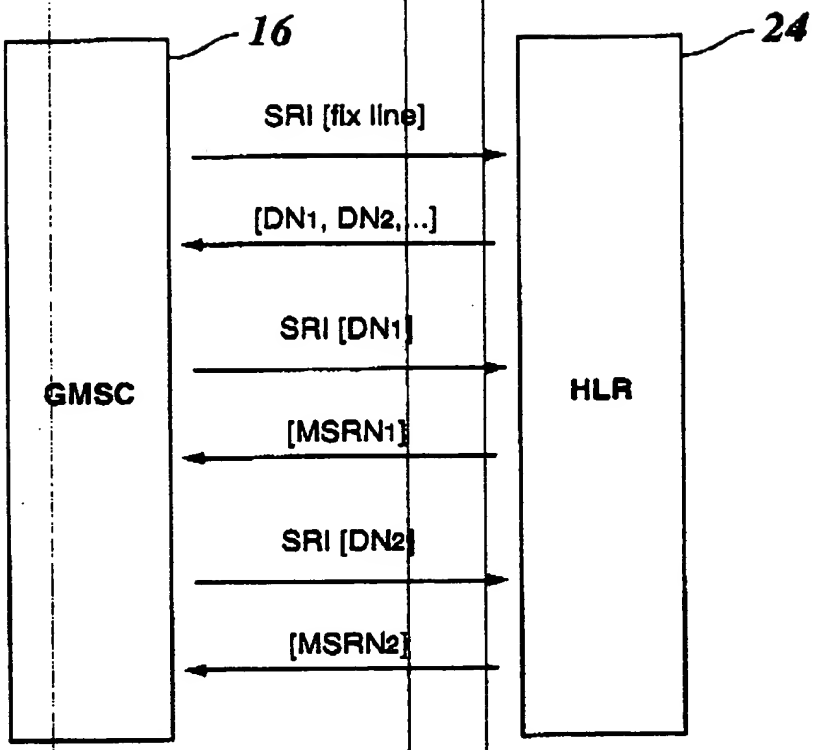

BEST AVAILABLE COPY